

# TWO-POST - DP10

**NEW!**

*Engineered to perform... Built to last!*



Padded shut-off bar to prevent damage caused by lifting a vehicle too high

Adapter bracket included

Two heavy-duty Direct-Pull™ hydraulic cylinders designed to minimize down-time by requiring little maintenance

Powder coat finish. More durable than conventional finishes

Closed loop hydraulic system - preventing hydraulic contamination



Shown: Model DP10A  
10000 lbs. capacity

## Engineering Excellence

Forward's U.S. engineers have over 29 years of combined experience designing automotive lifts for service and repair shops. Forward's philosophy is to own our designs rather than use someone else's off the shelf product.

## Product Integrity

21st century design tools allow us to create, control and validate our designs to ensure maximum performance. Forward lifts are rigorously tested to meet quality and durability standards. All product families are proof load tested to 1½ times rated capacity and rigorously cycle tested.




**Two-Post  
DP10  
is Gold  
Certified**

**FORWARD  
LIFT**

## FEATURES OF FORWARD DP SERIES LIFTS:

- Direct-Pull Lifting – High efficiency, low maintenance technology
- Closed loop hydraulic system – preventing hydraulic contamination
- Powder coat, oven baked finish – more durable than conventional coatings
- ALI/ETL third party tested & approved
- Padded overhead shut-off bar
- Spring operated arm restraints, disengage at floor level
- Low profile arms
- Includes truck adapters
- Single point lock release
- Optional high rise and extended height available

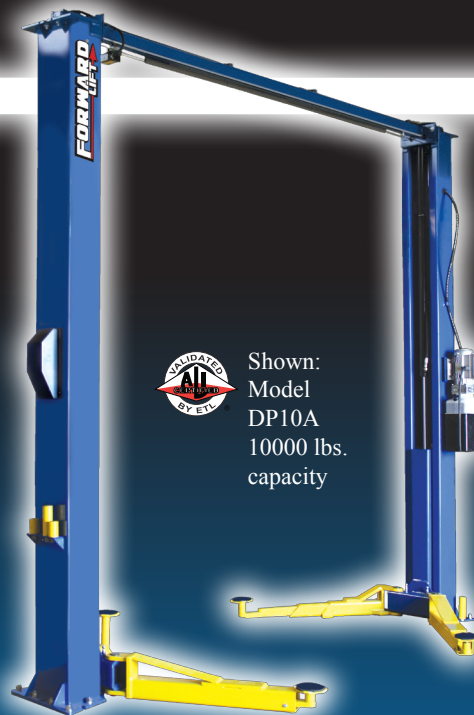

### Low-Profile Design:

The DP10 features low-profile / oversized pads with multiple extensions to raise most vehicles on the road today. Includes four each of the following extensions: 1.5", 3" and 6"



### Spot-Rite™ 3-Stage Front Arm Design:

The DP10A features offset arms to accommodate vehicles both symmetrically and asymmetrically. This feature allows the technician to position the vehicle doors in front of or behind the column to prevent door damage.

Specifications	DP10A DP10A2	DP10S DP10S2
Capacity*	10,000 lbs. (4536kg)	10,000 lbs. (4536kg)
Overall Height	143-3/8" (3642mm) 167" (4242mm)	143-3/8" (3642mm) 167" (4242mm)
Height to Shut-Off	136" (3454mm) 160" (4064mm)	136" (3454mm) 160" (4064mm)
Minimum Ceiling Height	144" (3658mm) 168" (4268mm)	144" (3658mm) 168" (4268mm)
Minimum Adapter Height (standard adapters)	3-5/8" (93mm)	3-5/8" (93mm)
Maximum Lifting Height High Rise (HR) Model Only	77" (1956mm) 86" (2184mm)	77" (1956mm) 86" (2184mm)
Adapter Extension Heights (stack type)	1-1/2" (38mm), 3" (76mm), and 6" (152mm)	1-1/2" (38mm), 3" (76mm), and 6" (152mm)
Front Arm Reach	23"- 44-1/2" (584mm - 1130mm)	38-3/8"- 52-7/8" (975mm - 1343mm)
Rear Arm Reach	38-1/2"- 58" (978mm - 1473mm)	38-3/8"- 52-7/8" (975mm - 1343mm)
Overall Floor Width	137" (3480mm) or optional 131" (3327mm)	
Inside Column Width	115-3/4" (2940mm) or optional 109-3/4" (2788mm)	
Drive Through	105" (2667mm) or optional 99" (2515mm)	
Voltage†	208/230v	208/230v
Amps	20	20
Motor	2 HP	2 HP

\* Capacity 2500 lbs. per arm  
† single phase standard;  
3-phase available at additional cost

Specifications subject to change  
without notice or liability.  
(Standard lift colors include blue and red.)



Forward Lift  
996 Industrial Drive  
Madison, IN 47250

Phone: 800.423.1722  
Fax: 812.273.7329  
www.forwardlift.com

Lit# Forward DP10\_2010.1

©2010 Forward Lift. Forward Lift is a brand of R.L. Consolidated, A Dover Company. All rights reserved. Unless otherwise indicated, Forward Lift, R.L. Consolidated, Dover and all other trademarks are property of Dover Corporation and its affiliates.